IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Audio Processor
Manufacturer: Ecler
Firmware Version: N/A
Model(s): CA200Z

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	4/3/2013	1.5.1	3.3.2	Initial version.

Driver Notes:

Driver has been optimized for Volume.

Control Commands & States:

Executive Mode	On	Off
IR Remote	On	Off
Power Control	On	Off
Preset Recall	1 to 5	
Preset Save	1 to 5	
Zone 1-2 Audio Mute	On	Off
Zone 1 Input 1-6	On	Off
Zone 1-2 Master Volume (Discrete)	0 to 64 in steps of 1	
Zone 1-2 Master Volume (Step)	Up	Down
Zone 1 Input 1-6 (Discrete)	0 to 64 in steps of 1	
Zone 2 Input 1-6	On	Off
Zone 2 Input 1-6 (Discrete)	0 to 64 in steps of 1	

Status Available:

Connection Status	Connected	Disconnected
Executive Mode	On	Off
IR Remote	On	Off
Power Control	On	Off
Preset Recall	1 to 5	
Preset Save	1 to 5	
Zone 1-2 Audio Mute	On	Off
Zone 1 Input 1-6	On	Off
Zone 1-2 Master Volume (Discrete)	0 to 64 in steps of 1	
Zone 1 Input 1-6 (Discrete)	0 to 64 in steps of 1	
Zone 2 Input 1-6	On	Off
Zone 2 Input 1-6 (Discrete)	0 to 64 in steps of 1	

MLC60 Series Supported Commands:

Executive Mode	On	Off
IR Remote	On	Off
Power Control	On	Off
Preset Recall	1 to 5	
Preset Save	1 to 5	
Zone 1-2 Audio Mute	On	Off
Zone 1 Input 1-6	On	Off
Zone 1-2 Master Volume (Step)	Up	Down
Zone 2 Input 1-6	On	Off

Cable and Adapter Requirements:

Contact manufacturer for pin diagram and cable and adapter requirements.

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	9600	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

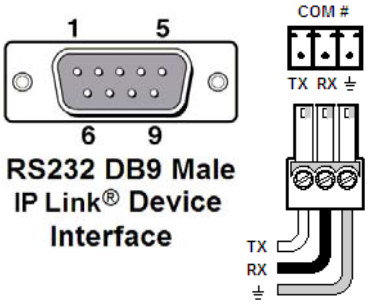

Please see cable and adapter requirements.

Note: Captive screw connector may also be used as a serial connection.

General Notes: